


M-Series

Lock Case Dimensions

Case Size:	4 ³ / ₈ " (113mm) x 5 ³ / ₄ " (146mm) x 1" (25mm)
Backset:	2 ³ / ₄ " (70mm)
Door Range:	1 ³ / ₄ " (44mm) – 2 ¹ / ₄ " (57mm)
Lock Front:	1 ¹ / ₄ " (32mm) x 8" (203mm) x 7 ³ / ₃₂ " (6mm)

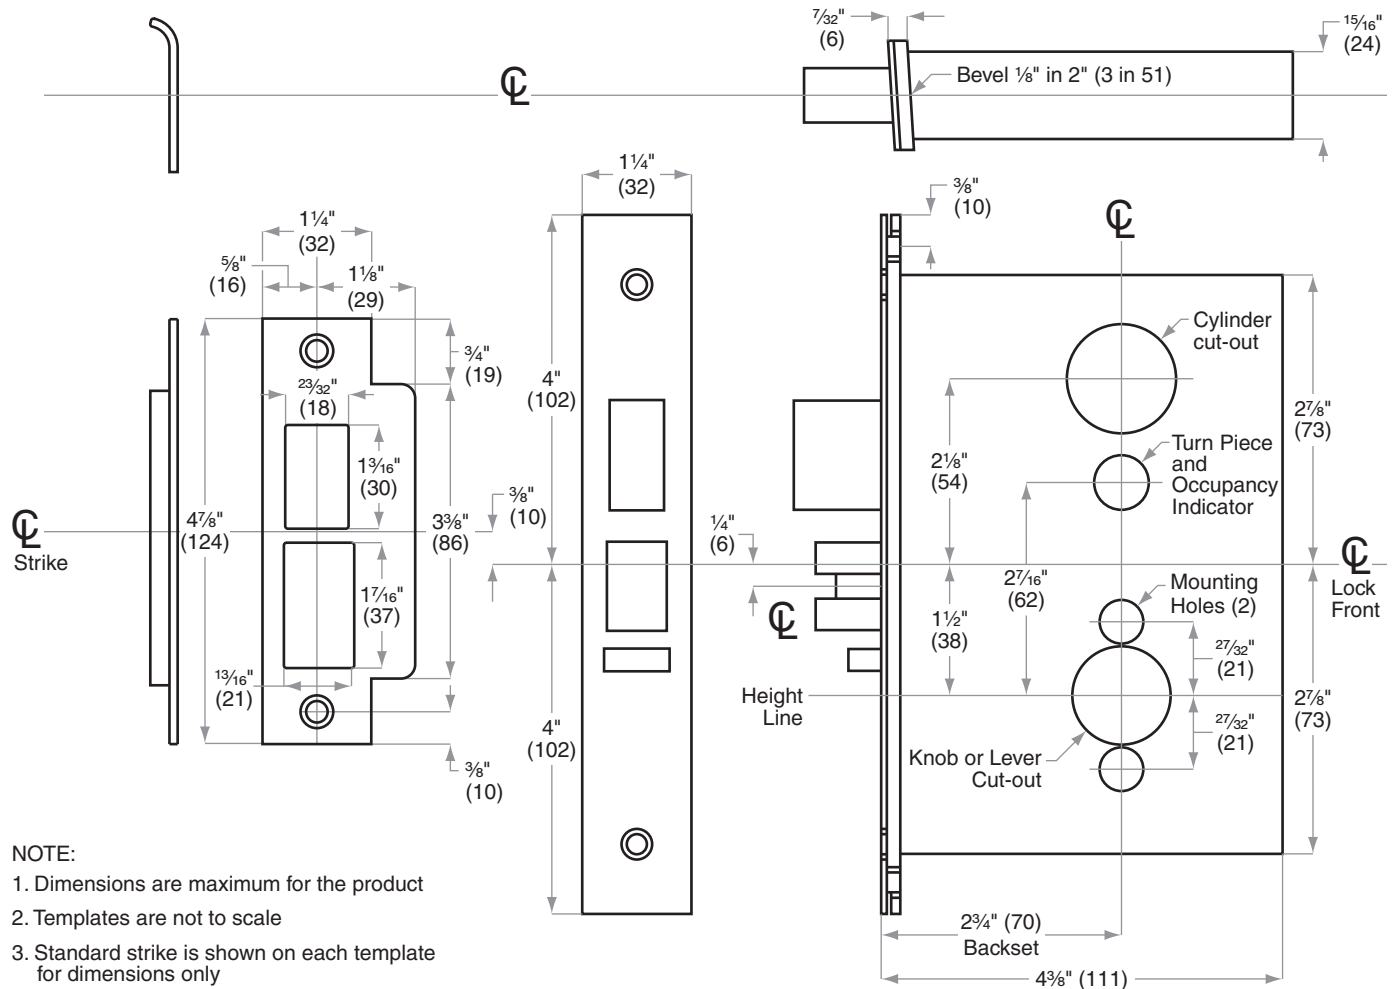

ANSI Standards: M-Series locks meet all requirements for installations in doors and frames prepared in accordance with ANSI specifications A156.13, 1994

Metal Doors: Suitable reinforcement is required to support lock case in center of door and to prevent door from compressing when trim is tightened. (See ANSI A115.1)

Thick Doors: Locks for non-standard door thickness may require special instructions

Lead Lining: When M-Series locks are ordered with lead lining, add 1/8" (3) to the width of the mortise cut-out on the lock case cover side of installation

Electrified Locks: Provisions must be made to route low voltage wire to the lock. Attach wires to the 6" (152) pigtail of the solenoid. Power transfer unit and low voltage wiring are not furnished

Dimensions shown in parentheses () are in millimeters

Job: _____

Date: _____

Door Thickness: _____

Remarks: _____

TEMPLATE
FM1